


EnOcean Easyclickpro flush-mounting receiver, 1-channel, with mounting plate

Product Data Sheet

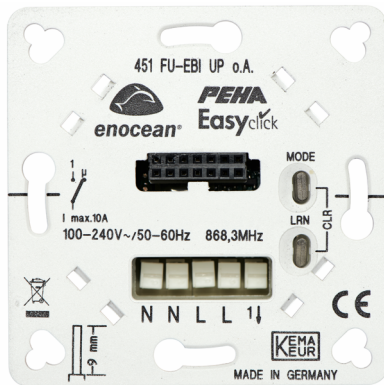

Current supply	230 V AC
Mounting method	Flush mounted (plaster)
Colour	White
Suitable for degree of protection (IP)	IP20
Suitable for venetian-/roller shutter switch	No
Push button mode	Yes
Switching mode	Yes
With radio controlled push button	No
Number of relays	1
Halogen free	Yes
Radio frequency	868Megahertz
2 channel	no
bi-directional	yes
energy metering	no
potential-free contact	no

EnOcean Easyclickpro flush-mounting receiver, 1-channel, with mounting plate

The bidirectional Easyclick receiver can not only receive radio signals, but also transmits back its status every time it changes. Actual ON/OFF switched states can then be visualised e.g. on the handheld transmitter D 450 FU-HS 128. The Easyclick receiver serves to switch lights and other electrical consumers.

With mounting plate for screwing down in switch sockets with 60 mm pitch between device screws • With socket board for receiving pushbutton attachment D xx.420.xx for local switching. A range of functions and parameters can be selected.

With pushbutton attachment:

- one-key operation ON/OFF (standard function changeover)
- one-key operation (ON/OFF)
- stairwell light with selectable running time and shutdown warning
- automatic OFF after selectable running time

With Easyclick transmitter:

- two-key operation ON/OFF (standard function)
- one-key operation ON/OFF (changeover)
- button operation (pulse)
- hotel card switch with definable follow-up time
- stairwell light with selectable running time and shutdown warning
- automatic OFF after selectable running time
- fan function with delayed ON and with selectable follow-up time
- save and retrieve 4 lighting scenes at the press of a key (one lighting scene per key)
- window handle and window contact, visualisation also parallel to the switching outputs
- movement detector and light sensor

A function can be defined individually for each of the max 32 programmed transmitters

Integrated repeater functions (1 level / 2 level) can be switched ON for each project, irrespectively of the set functions

Separate preassigned functions and parameters when e.g. window contacts, window handles, and movement detectors are being programmed

Technical data:

Own consumption: < 0.5 W (bistable relay)

Transmit frequency: 868.3 MHz

Voltage supply: 100–240 Vac/ 50–60 Hz

Neutral conductor: required

Ambient temperature: -20 °C to +40 °C

Storage temperature: -40 °C to +85 °C

Plugin terminals: max 1 x 1.5 mm²

Housing height: 34 mm

Rating: IP 20

With mounting plate: for screwing down in switch sockets

Approvals: CE; KEMA/KEUR

Load types 230 Vac (110 Vac)

Incandescent lamps 2500 W (1250 W)

HV halogen lamps 1200 W (600 W)

Motor load 600 VA (300 VA)

EVG load 3 pcs (3 pcs)

The quantity depends on the type and manufacturer. The device's data sheet must be observed!

Material No.	Article No.	EAN-code
00364516	D 451 FU-EBI UP O.A.	4010105364514

PEHA Elektro GmbH & Co.KG

a Honeywell Company
Daimlerstraße 4
58553 HALVER
DEUTSCHLAND

Tel.: 02353 9118 001
Fax: 02353 9118 311
mail: peha@honeywell.de
www.peha.de

Änderungen vorbehalten. © Honeywell PEHA